

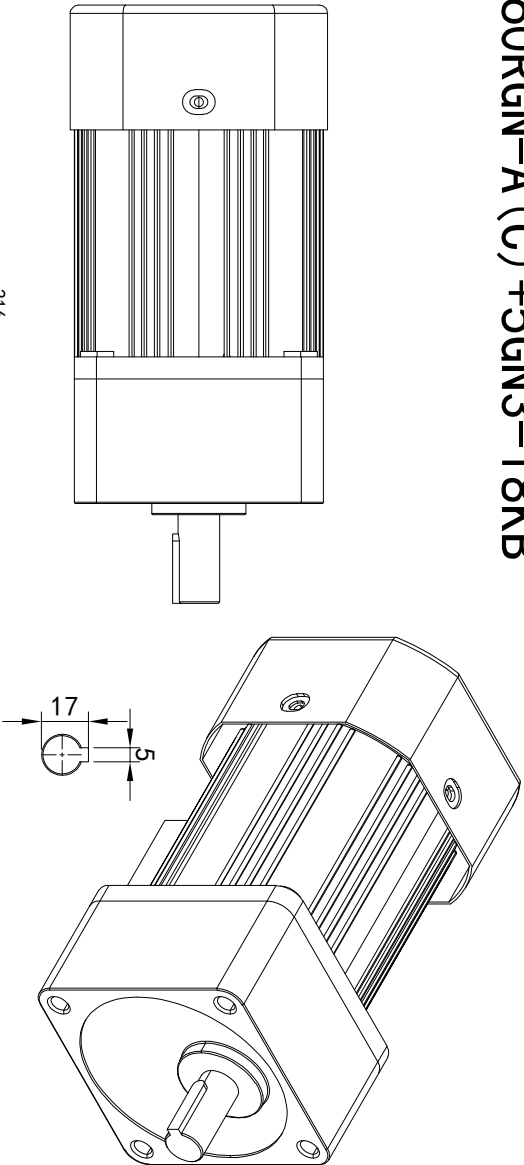


60W																		转矩单位换算：(kgf·cm×9.8÷100)=N.m (牛顿·米)					
速比：	3	5	7.5	10	12.5	15	18	20	25	30	36	50	60	75	90	100	120	150	180	250	300	500	750
转速 rpm (60HZ)	500	300	200	150	120	100	83	75	60	50	41	30	25	20	16	15	12.5	10	8.3	6	5	3	2
转速 rpm (60HZ)	600	360	230	180	144	120	100	90	72	60	50	36	30	24	20	18	15	12	10	7.2	6	3.6	2.4
转矩 kgf·cm	11	17.8	26.5	33.8	48	55.4	65	72.5	87.5	105	105	147	147	147	147	147	147	147	147	147	147	147	147

型号：51K60RGN-A(C)+5GN3-18KB

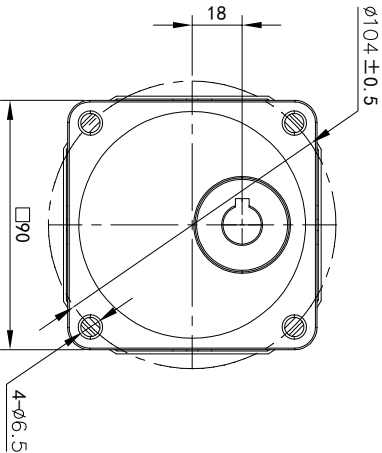

电机参数
功率：60W
电机额定扭矩：1.4 -5.5 kg·cm
电压：单相220V 4P
频率：50Hz - 60Hz

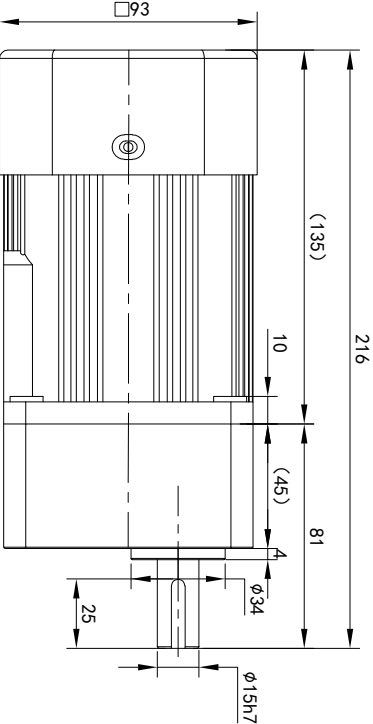

减速机参数
减速比：参阅上方表格
转速：参阅上方表格
扭矩：参阅上方表格

请签字 (章) 回传
Please sign (seal) to return the call

备注/附件登记																																								
旧版图号																																								
底图号																																								
签字																																								
日期																																								
单相马达接线图																																								
调速电机需配专用调速器，有多款调速器，该接线图仅供参考																																								
标记		处数		分区		更改文件号		签名		年月日		选型技术号		视图方式		重量		比例		浙江欧邦电机有限公司		微型感应减速机																		
设计		校对		Q. H. W		标准		版本		V1.0										51K60RGN-A(C)+5GN3-18KB																				
审核		工艺				批准								共 1 张 第 1 张		A4																								