

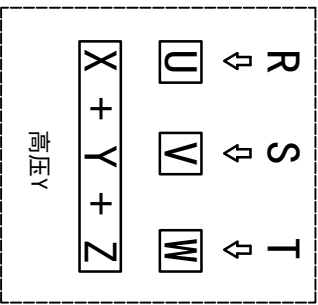
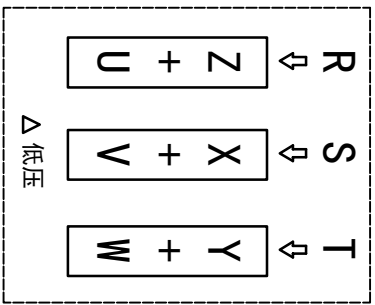
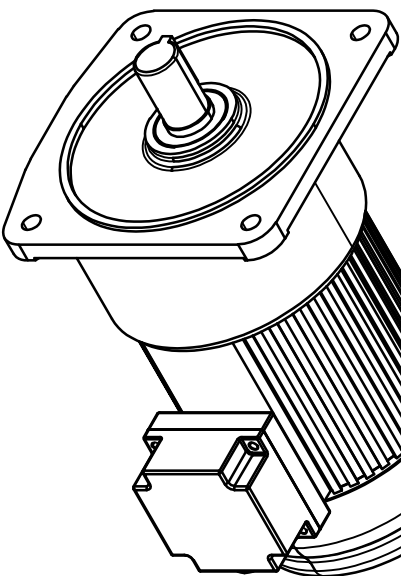
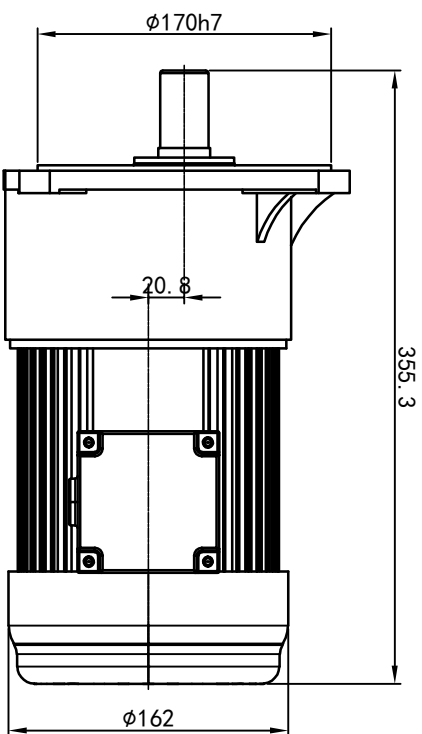
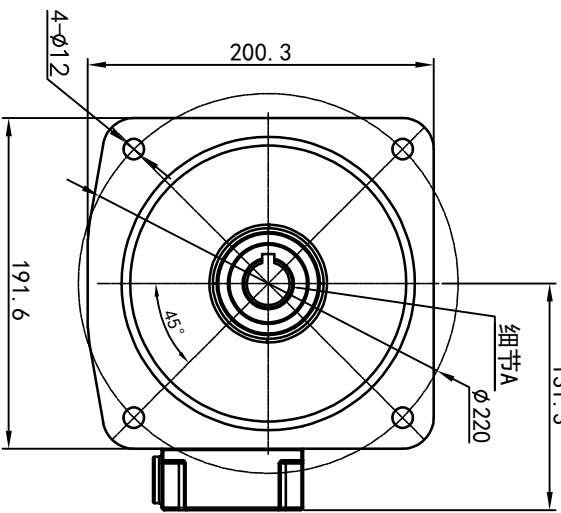


型号: GV-28-400-i-S-G2-RD (缩框型)





功率: 0.4kw (1/2HP)
 极数: 4P
 电压: 3相220V/380V
 接法: Δ / Y
 频率: 50Hz/60Hz
 减速比: 100~165
 扭矩: 225.4~355.74 Nm

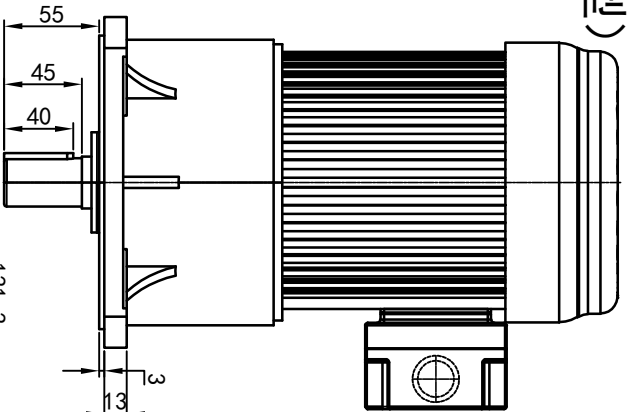

接线盒方向与入线口方向

卧式-排气孔方向

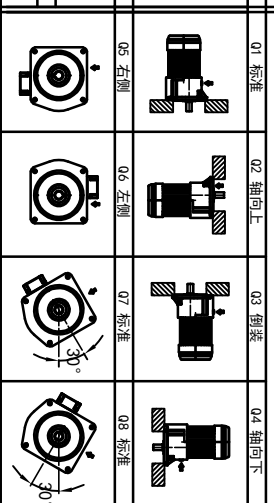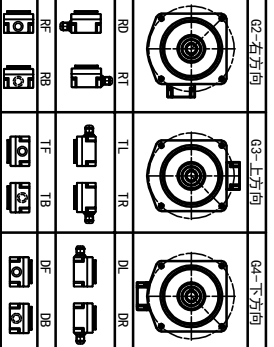

设计	校核	审核	工艺
0.H.W			
2023/11/13			
标准			
签名			
年月日			
选型技术号			

OUBARIS	重量	比例
www.oubang-motor.com	14.68KG	1:4
视图方式		
共 1 张 第 1 张		

浙江欧邦电机有限公司

GV 立式小齿轮马达

GV28-400w (缩框型)